


# Sunfilm™ Silage Wrap

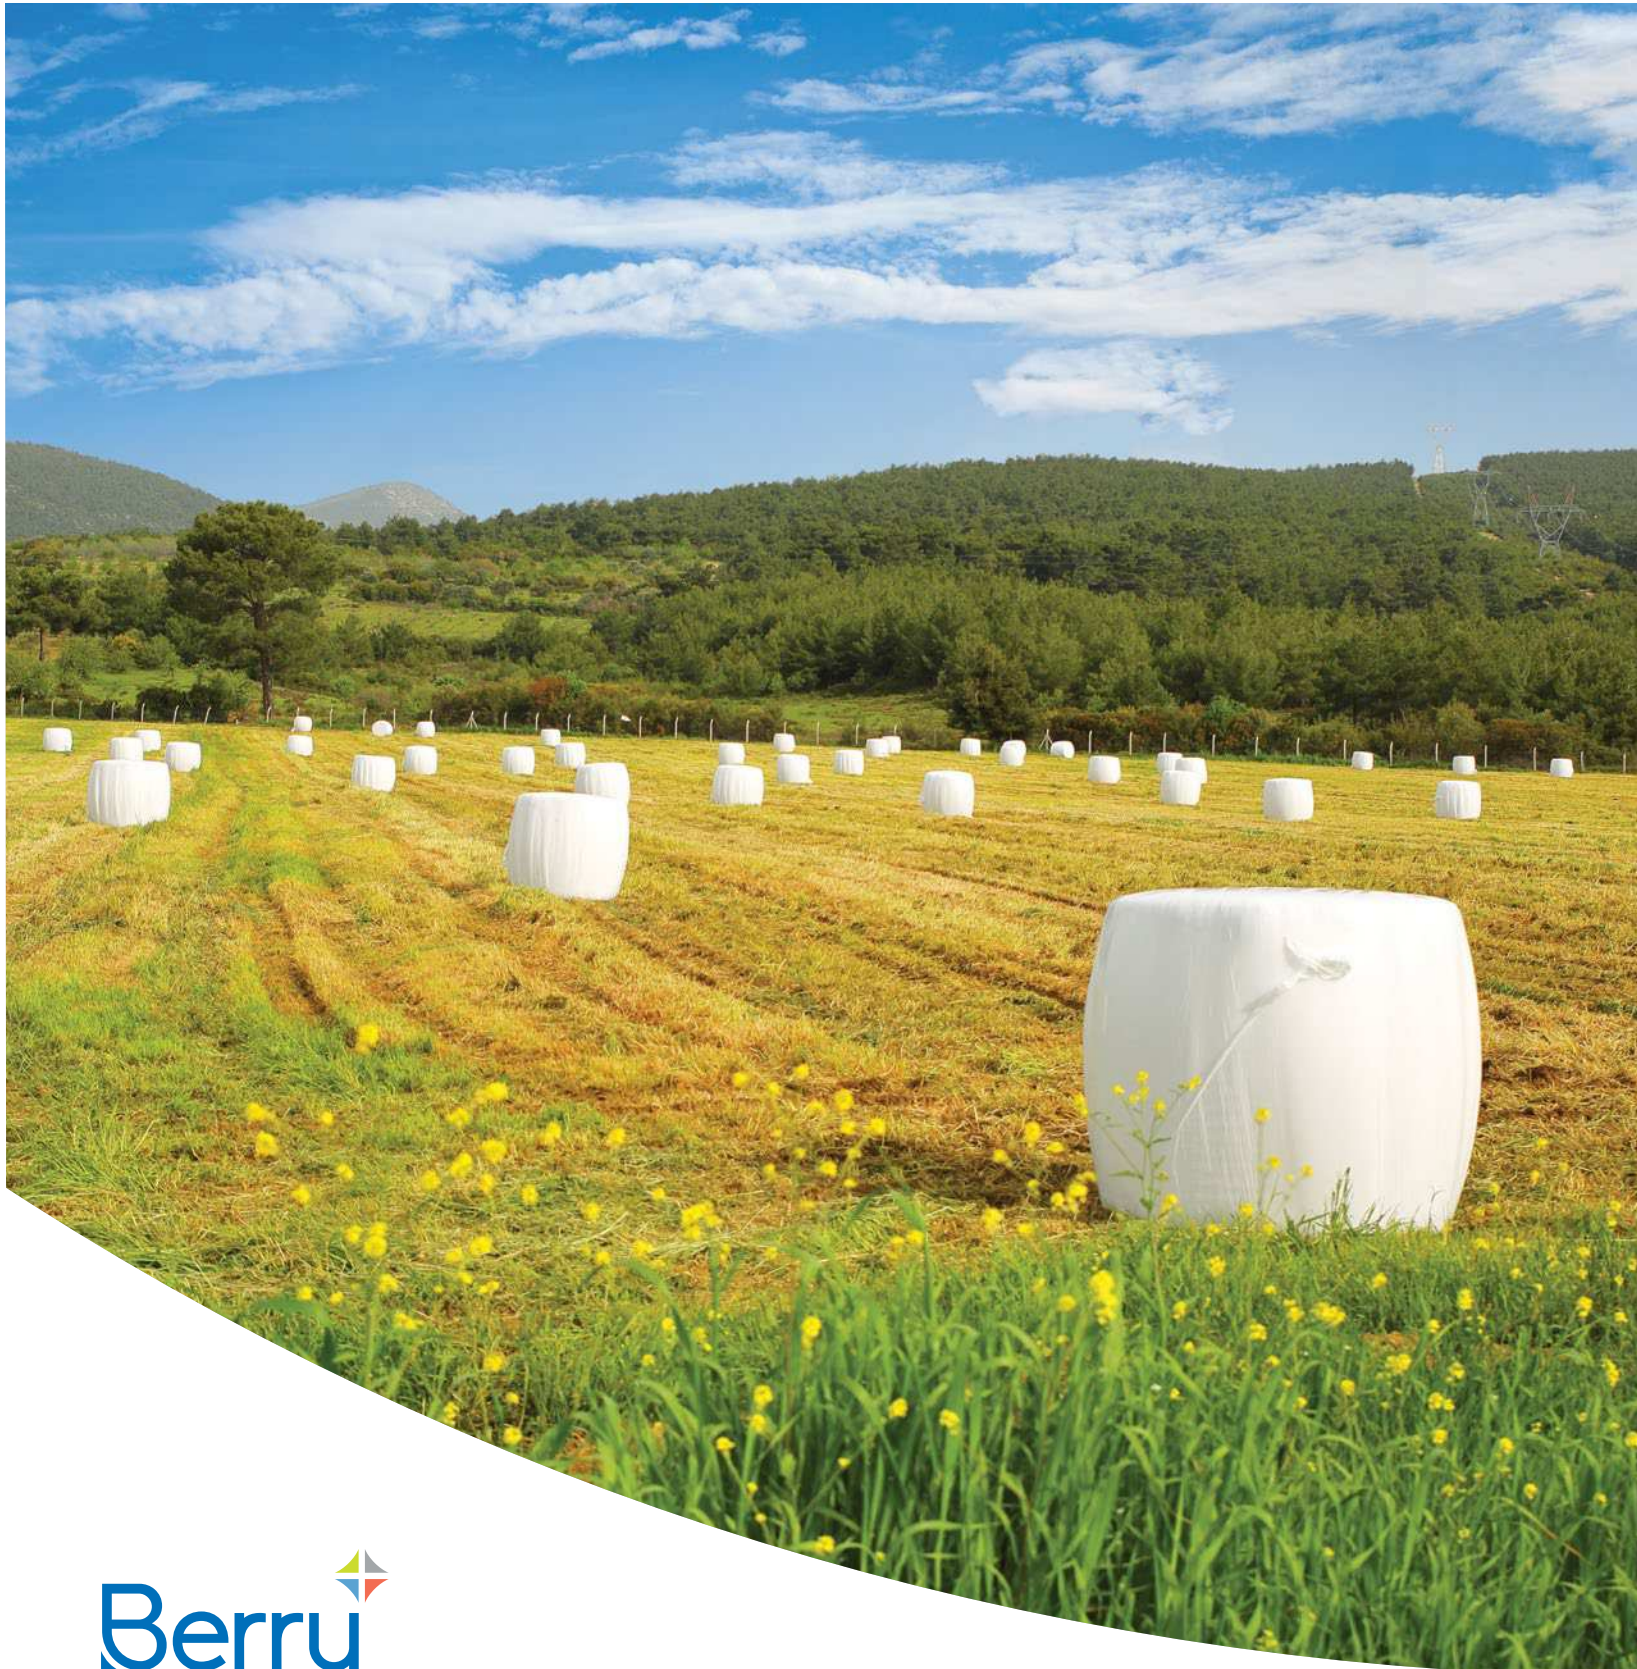

1.877.662.3779 | berryglobal.com

Sunfilm™ is a trademark owned by Berry Global, Inc. or one of its affiliates.

3938





## Excellent for Everyday Wrapping

Film wrapping protects silage all year from precipitation, reduces banded proteins by maintaining temperatures under 110°F (43.3°C) and saves net energy gain by thirty times more than dry hay.

### Sunfilm™ Silage Wrap Benefits

- Enriched feed nutrition values
- Tighter wrapped bales
- Great barrier protection, resistant to dust, water, and climate conditions
- Excellent bail protection
- Puncture and tear resistant
- Withstands the rigors of large, individual square, and round bales
- Improved productivity
- Reduced film breakage
- More bales wrapped per hour
- Wrap film protected during shipping by carton, design, and sleeve

### Sunfilm Silage Wrap Features

- Reflective UV properties
- Superior strength and tack
- High oxygen barrier property
- Proprietary resin formula
- High opacity film
- 75% pre-stretch



### Product Specs

Product	Silage Wrap 750 mm/30	Silage Wrap 500 mm/20
<b>Color</b>	White (RT100) Black (AB100) Green (LGR)	White (R100) Black (RT100)
<b>Gauge</b>	25 microns/1 mil	25 microns/1 mil
<b>Length</b>	1500 m/5000 ft	1800 m/6000 ft

### Typical Test Properties

Test	Test Method	Values
<b>Gauge</b>	ASTM-D-2103	.001" (25 microns)
<b>Tensile</b>		
<b>MD</b>	ASTM-D-882	5180 PSI (40 MPA)
<b>TD</b>	ASTM-D-882	4100 PSI (30 MPA)
<b>Elongation</b>		
<b>MD</b>	ASTM-D-882	559%
<b>TD</b>	ASTM-D-882	762%
<b>Tear</b>		
<b>MD</b>	ASTM-D-1922	140 grams (150 N/mm)
<b>TD</b>	ASTM-D-1922	830 grams (300 N/mm)
<b>Impact</b>	ASTM-D-1709-A	142 grams
<b>Puncture</b>	AEP-101	10.8 lbs (3.4 kg)
<b>Outdoor Life</b>	AEP-101	12+ months
<b>Cling</b>	Typical Value	1200
<b>MAC</b>	Opacity	0.28

### Silage Caps Benefits/Features

- Protects in-line wrapped bales
- Excellent seals
- Pin hole free film
- Outstanding bale protection
- High barrier properties
- Puncture and tear resistant
- Improved productivity
- Reduced film breakage
- More bales wrapped per hour

### Product Specs

Product	Sunfilm Caps	Sunfilm Bags	Sunfilm Sleeves
<b>Color</b>	White	White	Black
<b>Mil</b>	4	4	4
<b>Size/Bale Size</b>	Cap Size: 88"x72" 93"x72" 104"x72" 110"x72"	Fits Bale Diameter: 4' 4'-4.5' 5' 5'-5.5'	Bag Size: 88"x72" 93"x72" 104"x72" 110"x72"
<b>Packaging/ Pallet Information</b>	20 caps per roll/25 rolls per pallet MOQ: 3 pallets	20 bags per roll/25 rolls per pallet MOQ: 3 pallets	20 sleeves per roll/25 rolls per pallet MOQ: 3 pallets



### Use Instructions

- Overlap the film by 50% to provide ideal seal
- Wrap bails when moisture content is 40-60%
- Maximum bale storage of two high
- Single bale wrap application: Minimum of four to six wraps of film, six recommended
- In-line wrapping application: Minimum six to eight wof film

### Twelve Month Replacement Warranty

See [berryglobal.com/agfilmswarranties](http://berryglobal.com/agfilmswarranties) for details

For more information call us at 1.877.662.3779 or visit [berryglobal.com](http://berryglobal.com)